

JSR ENGINEERING SOLUTION



Plot No-112, Noida Sec-73, Gautam Buddha Nagar Utter Pradesh - 201307 Tel: +91 8368661339
E-mail: jsrengineeringsolution@gmail.com

ABOUT US.....	01
PASSENGERHOLSTSPARES.....	02
SAFETY DEVLCE.....	06
ANEMOMETER.....	07
SOLARAVLATLONLIGHT.....	08
LIMIT SWLTCH.....	09
TOWER CRANE PIN, NUT & BOLT.....	10
TOWER CRANE SPARES& ACCESSORLES.....	11
TOWER CRANE SAFETY ACCESSORLES.....	13



JSR ENGINEERING SOLUTION


ABOUT US

JSR ENGINEERING SOLUTION is an eminent entity indulged in Manufacturing, supplying, Trading and Importing a huge compilation of Tower crane spares, Passenger Hoist spares, Accessories etc. Manufactured making use of supreme in-class material and progressive tools and technology; these are in conformism with the norms and guidelines defined by the market. Along with this, every product is tested on a set of parameters prior to the final delivery of product.

With a motive to stand high on the visions of our patrons, we are committed in providing a huge array of products to our patrons, which are in tandem with the comprehensively accredited standards of quality.

spare part management is an important element of maintenance which acts as a stepping stone to achieve project milestones. We at **JSR ENGINEERING SOLUTION** understand that any lack in the spare parts or inferior quality parts would create unexpected downtime leading to loss of valuable time and project capital.

We offer safe and efficient operations solutions to our clients by supplying superior quality spare parts and Accessories for construction Industry

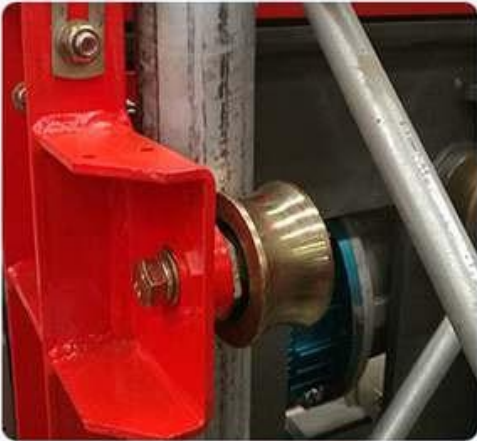










PASSENGER HOIST SPARES

Guide Roller-1	Guide Roller-2	Guide Roller-3	Guide Roller-4
			
Guide Roller-5	Guide Roller-6	counter Roller-1	counter Roller-2
			
counter Roller-3	counter Roller-1	counter Roller-2	
			

Pinion-1	Pinion-2	Pinion-3	counter Roller Pin
			
coupling	Door Pulley-Fibre	Trolley Roller-Fibre	Trolley Roller-Metal
			
Guide Roller Pin	Guide Roller Pin	Guide Roller Pin	Brake Liner
			

PASSENGER HOIST SPARES

cable Pulley	Bracket For cable Trolley	cable Trolley Pulley	Off center Bolt For Trolley
			
worm & worm wheel	Rack & Pinion	Limit Switch	Limit Switch-2Nc
			
Limit Switch	Joystick	Rectifier-Sew	Overload Protection System
			

we are importer & Supplier of Superior Quality Safety Device for Passenger Hoist.




ANEMOMETER

Three cup Anemometer with Digital Display For Tower crane


01 Anemometer is designed as the intelligent speed sensing alarm devices, its interior adapts advanced digital communications technology. The system has high stability, strong anti-interference ability, high detection wind cup with the special material, mechanical strength strong wind resistance ability, the case design is novel and unique durable, convenient installation and use. All the electric interfaces are in line with the international standards, without installation debugging, can be used on different working condition.



Dimension Diagram:

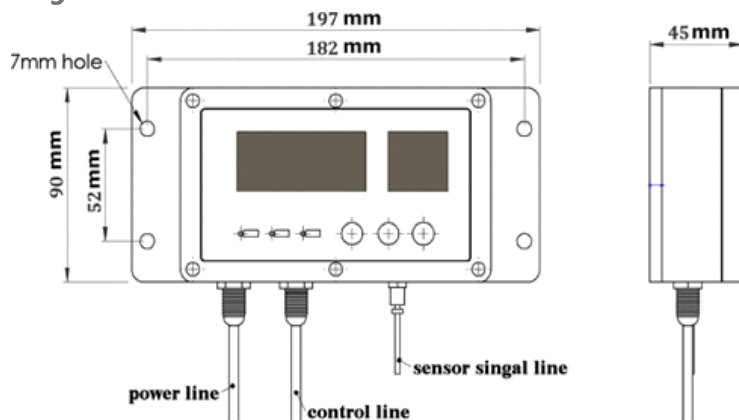


connection Diagram:

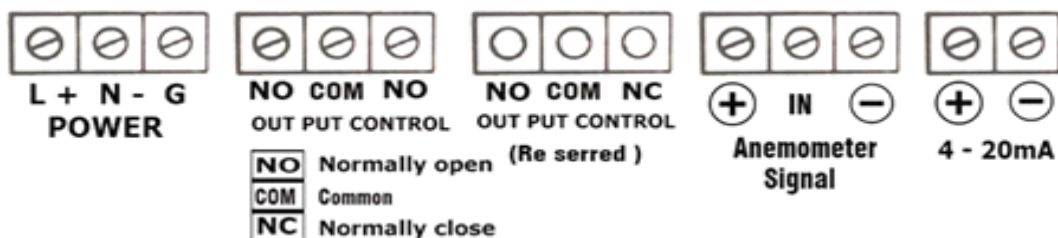




Ordinary
Solar Light-3 LED

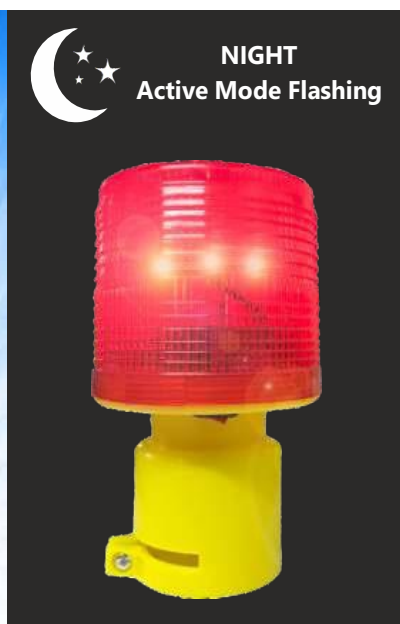

MAJESTA
Solar Light-6 Special LED

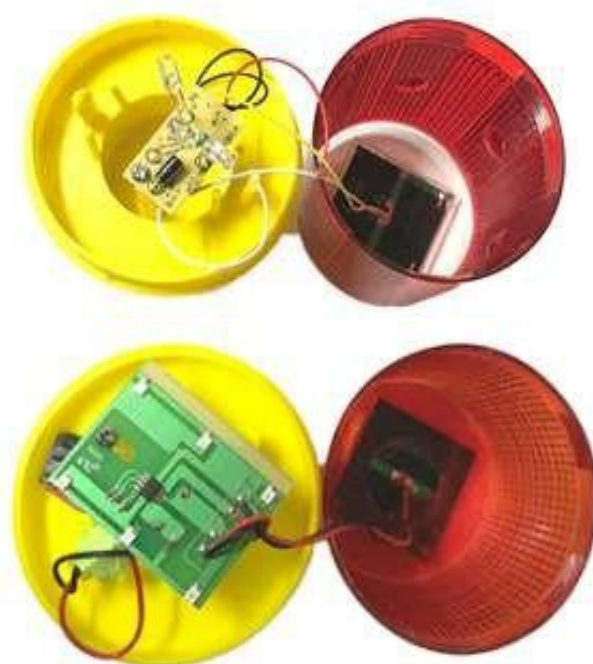

Specification:

Flash Frequency	30 times/min
Solar Panel	80 MA
Light color	Red
No of LED	6 Bright LED
Battery	AA600mAh
Auto On/Off	Yes
Day	charging Mode
Night	Active mode Flashing

LIMIT SWITCH

LIMIT SWITCH-DXZ




DXZ Multi-function limit switch is widely applied to control and limit trilinear coordinates of space of the lifting, transmission in building, port, mining and other industries , DXZ Multi-functions limit switch has many characteristics, like small volume, many

functions, high accuracy, adjustable limit, better compatibility, convenient to install, maintain & adjust.

Technical Specifications:

Type	: DXZ
Rated Voltage	: Ac125~400V/Dc30~110V
Rated current	: 6A
control Level	: 4 N/O, 4 N/c
Ratio	: 1:13~960
Operating speed	: 1mm-50cm/s
Protection degree	: IP65
Operation temperature	: 233-328K(-40~+55 °)
Operating humidity	: ≤90%RH

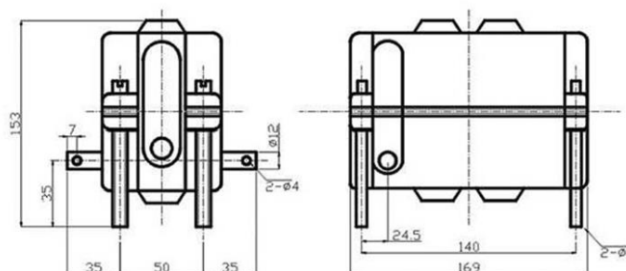

No.	1	2	3	4	5	6	7	8
Ratio	1:13	1:17	1:46	1:60	1:78	1:210	1:274	1:960



10.9 Gr Nut & Bolt for Tower crane

TOEWR CRANE SPARES & ACCESSORIES

HRCV	RCV	Load Moment Pulley	Joystick-1
			
Joystick-2	Joystick-3	Joystick with chair	Joystick-4
			
Potential Meter 5/10 K	Lightning Arrestor	Slewing Gear Box	wire Rope Pulley
			

concrete Bucket	concrete Bucket	concrete Bucket	Debris Bucket
			
Man Basket	Material Lifting Bucket	c Frame	Tie
			
Foundation Leg	Mast	Mast	Operator cabin
			

TOWER CRANE SAFETY ACCESSORIES

SAFE LOAD INDICATOR

ANTI COLLISION DEVICE



THANK YOU

FOR WATCHING